


BODYCRAFT

Installing your Cadence / Speed Sensor & Magnet on the R200/R400.

R200/R400

Bluetooth SMART & ANT+
Cadence / Speed Dual Bike Sensor
SENSOR ID:
SCA _____

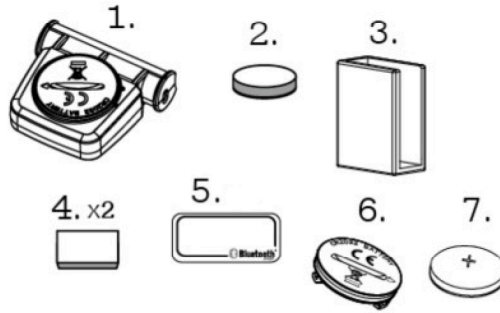

1. Cadence / Speed Sensor
2. 3x10mm Magnet with adhesive backing
3. Sensor Holder
4. Double-sided EVA Tape (x2)
5. ID Label (to be applied to the bike)
6. Battery Cover w/O-ring
7. CR2032 3V Lithium Battery

*The goal of this install is to simply allow the magnet to pass within 1/4" of the arrow symbol on the sensor. Without removing the adhesive on the magnet, place the magnet on the inside of right crank arm to fine-tune placement before permanently placing with adhesive.

Go to www.bodycraft.com for the video version of the installation specific to your bike. Select your model in the products section or enter it in the search bar.


STEP A:

Place part #4 (Double-sided EVA Tape) to the back of part #3 (Sensor Holder). Make sure the longer opening on Part #3 is facing toward the front of the bike and the shorter opening is facing upward (see pic #4). Place Part #3 (Sensor Holder) on shroud as shown in picture #2. The bottom edge of the sensor holder should line up at the bottom edge of indent on the shroud (pic #4) and should be as far right as possible (pic #2).




STEP B:

Remove battery cover from part #1 (Cadence / Speed Sensor). Place part #7 (CR2032 3V Lithium Battery) positive +side up. Slide Part #1 (Cadence / Speed Sensor) into part #3 (Sensor Holder) making sure the arrow on part #1 is facing outward and pointing toward the front of the bike as shown in pic #3.



STEP C:

Remove adhesive backing on part #2 (3x10mm Magnet with adhesive backing). Place part #2 onto the inside of the right crank arm as shown in picture #5 and #6. Align magnet on the crank arm with the sensor as shown in pic #6. The magnet should pass by the arrow and bottom corner of sensor (pic #6). You may have to reposition the magnet up or down on the crank arm to ensure it passes correctly. If magnet makes contact with part #3 (sensor holder), readjust placement of sensor holder slightly towards the R200/R400 logo (.25")

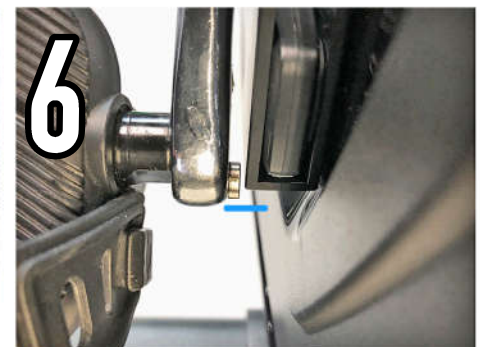

NOTE: If installing sensors on multiple bikes, place part #5 (ID Label) on rear stabilizer frame.